
Date: 03.06.2024



## ENTRANCE MATTING SYSTEM CLEAN SYSTEM SCRUB

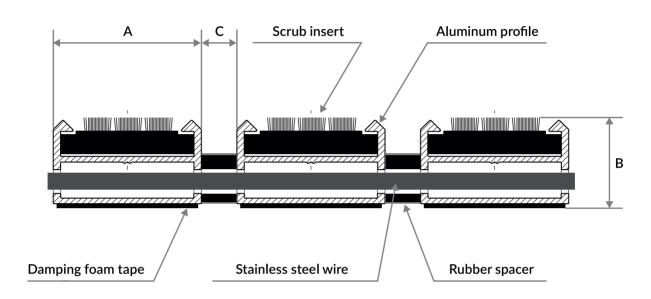

	A [mm]	B [mm]	C [mm]
Clean System Scrub 12	30	18	3 – 5
Clean System Scrub 17	30	22	3 – 5
Clean System Scrub 22	30	25	3 – 5
Clean System Scrub 27	31	32	3 - 5
Clean System Scrub 22 Strong	32	25	3 – 5
Clean System Scrub 22 Premium	52	25	3 - 5

## PRODUCT SPECIFICATION:

Doormats Clean System Scrub are made of aluminum with Scrub insert. Profiles are coupled with stainless steel cord. Aluminum profiles are separate with rubber spacers. Construction allow us to easy roll for clearing and transporting the mat.

Free space between aluminum profiles can have between 3mm and 4,5mm.

Construction of doormats allow us to manufacture mats in any dimensions and shapes. Width of the mat is obtained as a result of cutting the profiles and length is obtained as a result of adding aluminum profiles and squeezing rubber spacers.

Clean System Scrub			
Hygienic Certificate	HK/B/0628/01/2014		
Anti-slip norm according to DIN 51130:2014	R13		
Fire classification according to PN-EN 13501-1+A1:2010	C <sub>n</sub> - s1		
Material of aluminum profile	EN AW 6063 T6		
Stationary load	3 500 kg/100 cm <sup>2</sup> - standard version 10 000 kg/100 cm <sup>2</sup> - strong version		
Scrub Insert			
Fibres PA6.6 with thickness	0,4 mm		
Brush/scrub profile with	PP		
Stainless steel wire with thickness	0,7 mm		
According to Manufacturer Scrub insert meets the requirements of EU 2002/95/EC entered into force 01.07.2006 and it is manufactured in accordance with Directive ROHS 2002/95/EC.			

tel. 22 48 96 500

fax: 22 48 96 555